


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet
ALCYO22 ATE (*)

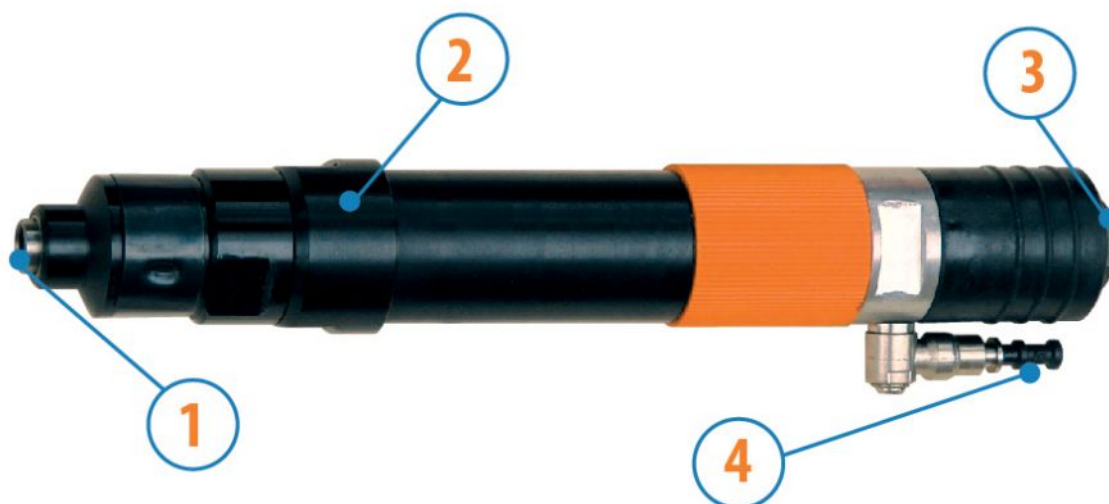

- 1. 1/4" hexagonal bit holder
- 2. Grip zone
- 3. Compressed air inlet
- 4. Screwing completed signal

Technical specification

Right rotation - Model	ALCYO22 ATE (*)
Right rotation - Code	8604273
No-load speed - rpm/min	1200
Torque Nm - Nm	0,8 - 2
Clutch spring	Blue

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Torque Adjustment

Data sheet
ALCYO22 ATE (*)

