# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALFB22R ATE**

ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

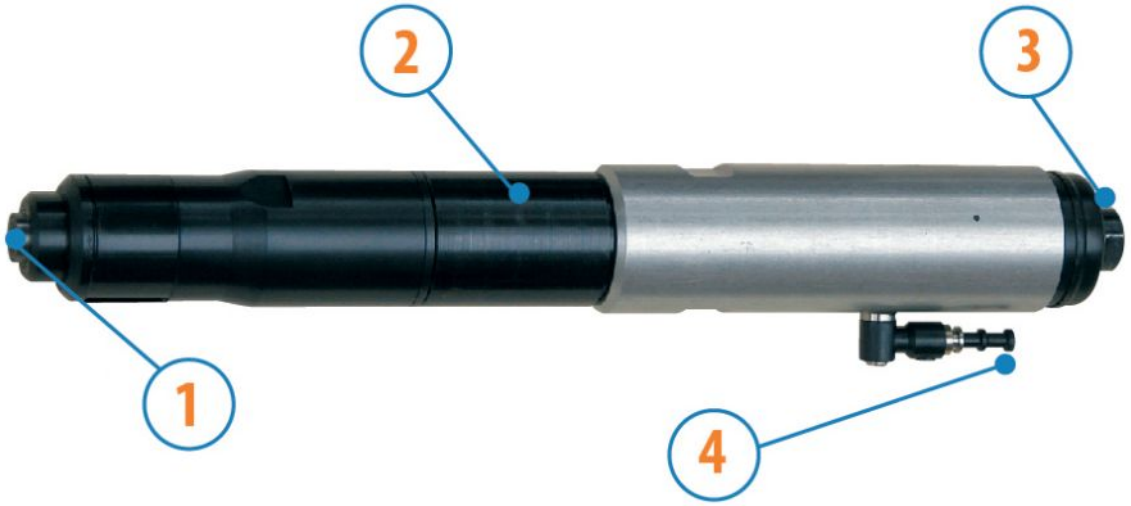


1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

## Technical specification

| | |
|---|---|
| Reversible - Model | ALFB22R ATE |
| Reversible - Code | 8604280 |
| No-load speed - rpm/min | 900 |
| Torque Nm - Nm | 1,8 - 3,5 |
| Clutch spring | Orange |

## Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

## Torque Adjustment

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALFB22R ATE**

ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

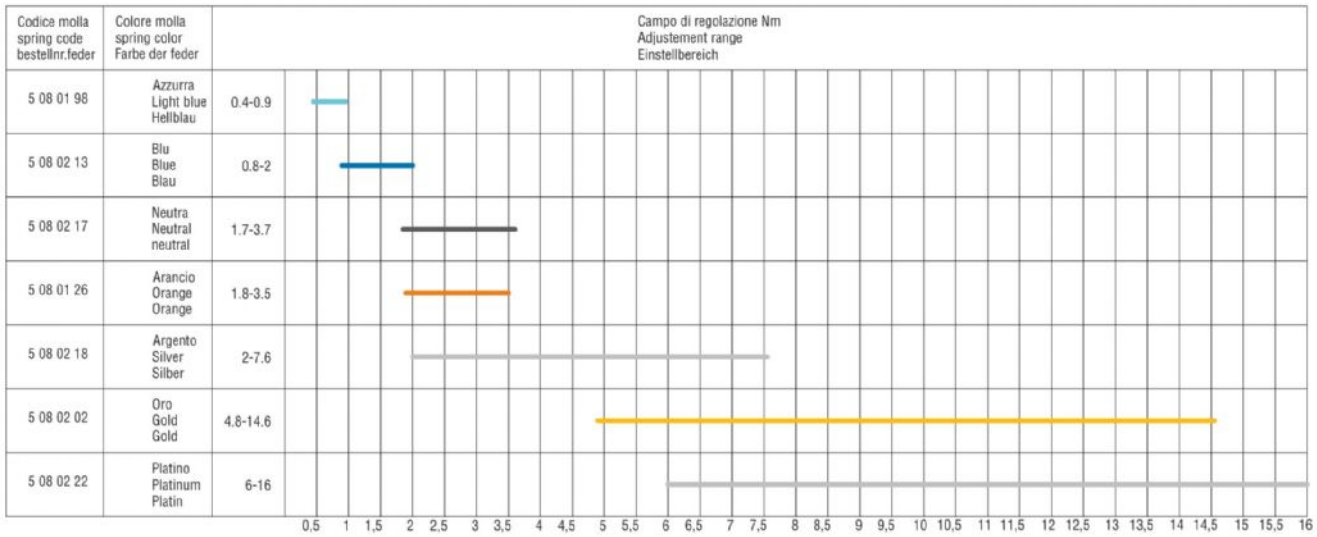


## Overall dimensions

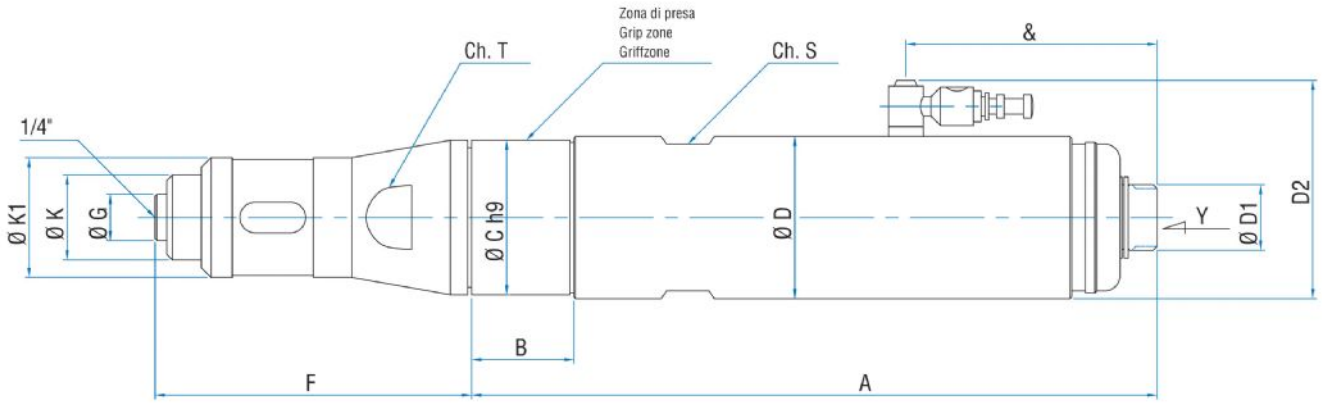

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALFB22R ATE**

ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

| Model | Code | A | B | C | D | D1 | D2 | F | G | K | K1 | S | T | Y | & |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALFB22R ATE | 8604280 | 169,7 | 27,7 | 34 | 38 | 17 | 52,5 | 100 | 12 | 22 | 31 | 34 | 32 | 1/4" | 65 |