


AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SCREWDRIVERS WITH FIXED AUTOMATIC FEED - thrust and return
with parallel piston

Data sheet UAM PAC - SCREW GUIDE HEAD WITH SPRING MOVEMENT

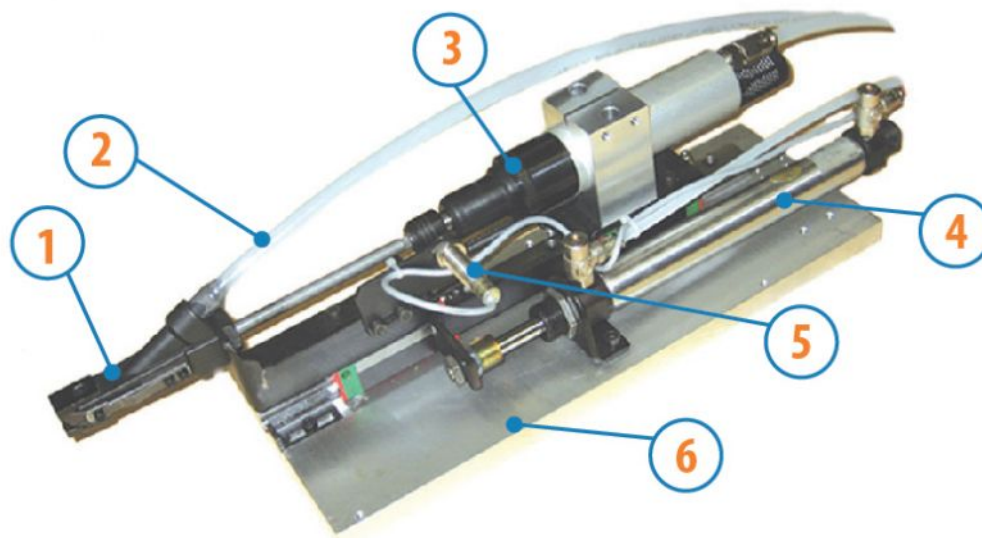

1. Head screw guide
2. Screws supply pipe
3. Engine
4. Hydraulic cylinder
5. Adjustable Proximity Sensor
6. UAM Base

Technical specification

Dimensions of the screws that can be fed with the normal standard equipment (mm)

CIAPPETT

Ø testa	3,5 - 4,2	4 - 5,2	5 - 6,5	6 - 7,2	7 - 8,2
Length	8 - 25	10 - 25	12 - 25	14 - 25	16 - 25

COMPAT

Ø testa	4 - 5,2	5 - 6,5	6 - 7,2	7 - 8,2	8 - 9,2
Length	10 - 25	12 - 25	14 - 25	16 - 25	18 - 25

TUBO

Ø testa	6 - 7,2	7 - 8,2
Length	14 - 35	16 - 35

MAXI

Ø testa	5 - 6,5	6 - 7,2	7 - 8,2	8 - 9,2	9 - 10,4	10 - 11,4	10,5 - 12,5	12 - 13,5
Length	12 - 52	14 - 52	16 - 52	18 - 52	20 - 52	22 - 52	24 - 52	26 - 52