


## Drilling unit

### TASG series - Pneumatic thrust and return

Chuck connection: B16 ER20 collet holder. Collets in sizes from 1 to 13 mm are available on request on all models. A 16 mm chuck is available on request on the models TASG5, TASG7 and TASG 8.

## Data sheet TASGH

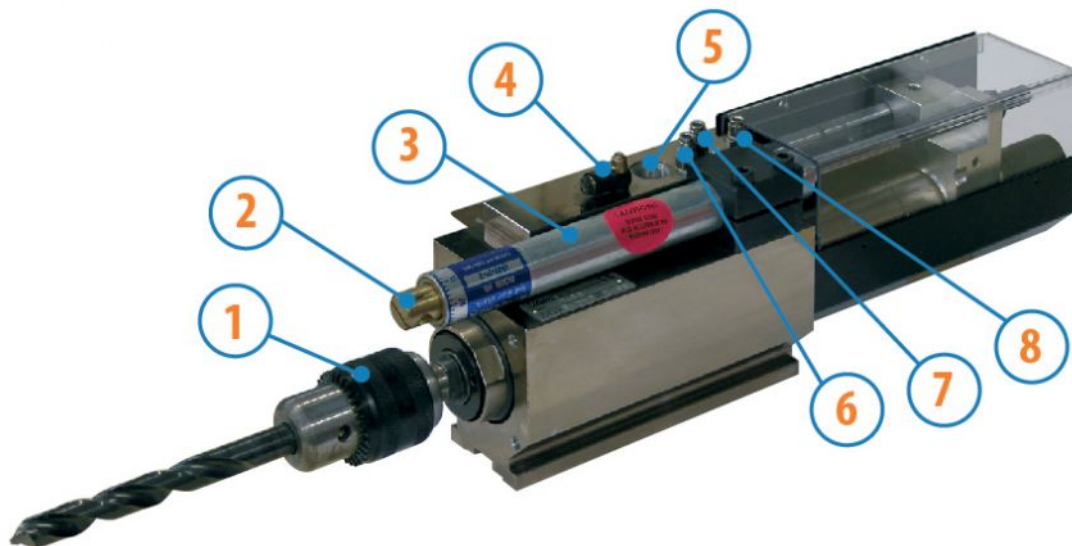

1. Chuck
2. Brake Controller
3. Brake assembly
4. Regulator for feed unit connection
5. Engine power connection
6. End stroke pressure network
7. Adjustment for return connection unit
8. Output signal to the crushing of end stroke

### Technical specification

|                                  |          |
|----------------------------------|----------|
| Model                            | TASGH    |
| Code                             | 8602349  |
| No-load speed - rpm/min          | 14000    |
| Drilling capacity mm - Wood      | 6        |
| Drilling capacity mm - Aluminium | 3        |
| Drilling capacity mm - Steel     | 1,5      |
| Total stroke - mm                | 100      |
| Braked stroke - mm               | 50       |
| Feed thrust at 6 bar - Kg        | 100      |
| Power - Watt                     | 450      |
| Power - HP                       | 0,6      |
| Weight - Kg                      | 5,7      |
| Air consumption - NI/cycle       | 650      |
| Air                              | 1/4' GAS |
| Hose - ø min                     | 10       |
| Standard chuck - Code            | ER *     |