

## ANGLE COUNTERSINKS

Angle - Lever start

WATT: 150 / CONSUMPTION: 250 NI/1'

Data sheet

**USV988**



### Description

Tools especially studied for flaring and / or deburring holes, using chamfer bits with straight shank type DIN 334 – 335 or similar.

They can use bits for steel, aluminium, wood, plastic and be employed in any application.

The model with straight shank is light, versatile, user friendly and can be easily used for most works.

The push start makes the operator work easier and allows the work effort to be adjusted according to the push performed on the tool.

The gun and angled models are usually intended for heavier applications or when the normal working position makes them more functional.

They are supplied with ER16 collet of the size indicated in the table

On request:

- ER16 collets of the indicated size
- Exhaust conveyer

### Technical specification

## ANGLE COUNTERSINKS

Angle - Lever start

WATT: 150 / CONSUMPTION: 250 NI/1'

Data sheet  
**USV988**

Model	USV988
Code	8201560
No-load speed - rpm	370
Sinking of holes from steel - Ø mm	2 - 24
Countersink - Ø mm	25
Standard ER 16 tool holder collet - Ø mm	10
Optional ER 16 tool holder collet - Ø mm	5 - 6 - 8
Length (without tool) - mm	227
Weight - Kg	1,10
Air connection	1/4" GAS

Overall dimensions



# ANGLE COUNTERSINKS

Angle - Lever start

WATT: 150 / CONSUMPTION: 250 NI/1'

Data sheet

**USV988**

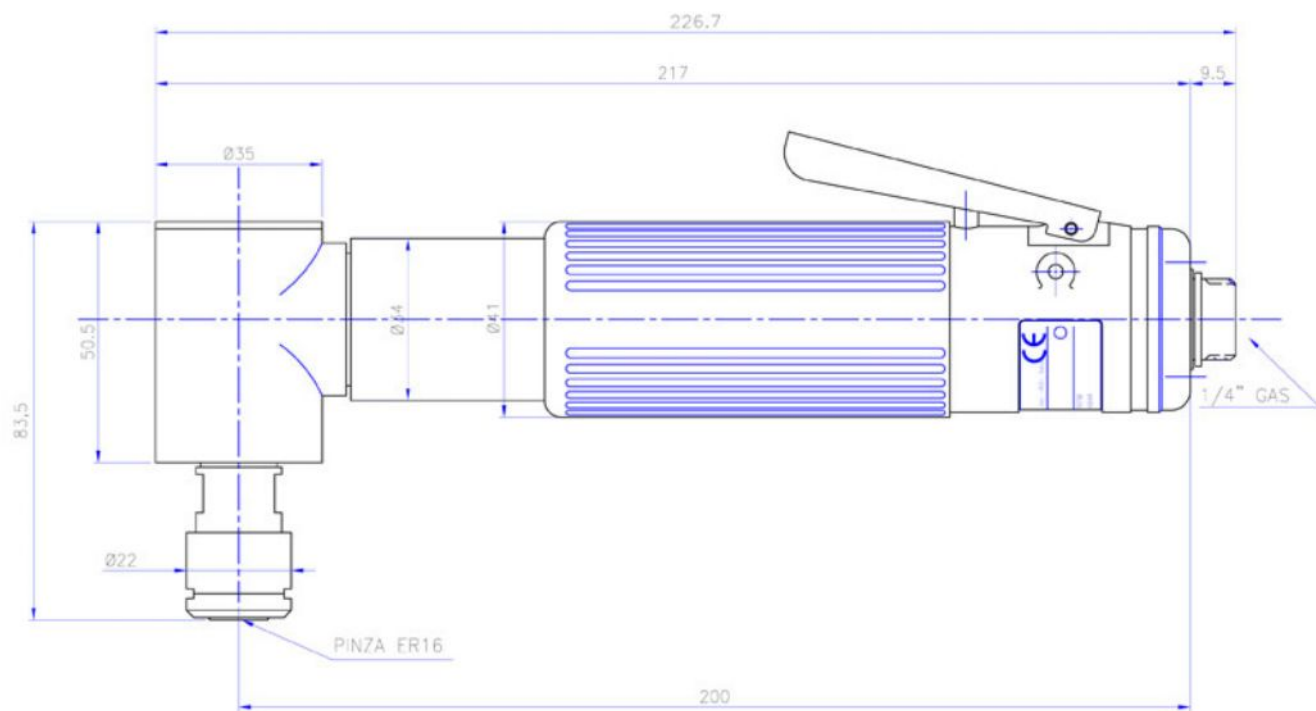

Vista Scala 1:2