

## SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet  
**LGG15R**



- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlets
- 4. Air exhaust


### Technical specification

|                          |         |
|--------------------------|---------|
| - Model                  | LGG15R  |
| - Code                   | 8731220 |
| Speed rpm - No-load      | 15      |
| Speed rpm - at Max Power | 8       |
| Torque Nm - at Max Power | 456     |
| Torque Nm - Stall Torque | 657     |

### Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

### Characteristic curves

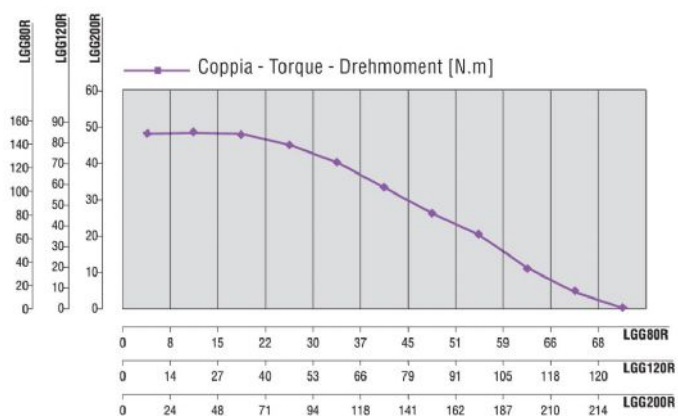

## SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet  
**LGG15R**

### Permissible radial and axial loads

| Model  | Code    | Fr (N) | Fa (N) | Co (N) |
|--------|---------|--------|--------|--------|
| LGG15R | 8731220 | 3350   | 3900   | 7800   |

### Overall dimensions

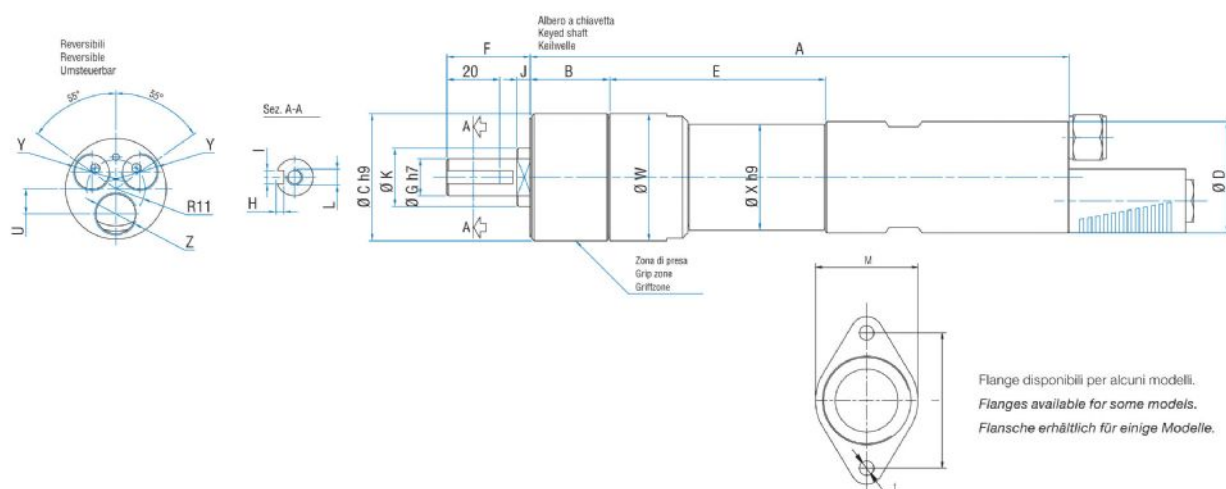

| Model  | Code    | A   | B     | C  | D  | E    | F  | G  | H   | I | J | K  | L  | U  | V  | W  | X  | Y    | Z    |
|--------|---------|-----|-------|----|----|------|----|----|-----|---|---|----|----|----|----|----|----|------|------|
| LGG15R | 8731220 | 289 | 110,2 | 85 | 42 | 86,8 | 38 | 20 | 3,5 | 6 | 1 | 30 | M6 | 11 | 13 | 48 | 40 | 1/4" | 3/8" |