MOTORS WITH POWER UP TO 850 W

LCYO SERIES - Reversible

WATT: 110 / CONSUMPTION: 340 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm

Data sheet
LCYO22R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	LCYO22R
- Code	8731232
Speed rpm - No-load	1500
Speed rpm - at Max Power	895
Torque Nm - at Max Power	1,3
Torque Nm - Stall Torque	2,1

Form features

Standard delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft - threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Flange or auxiliary supports

Characteristic curves

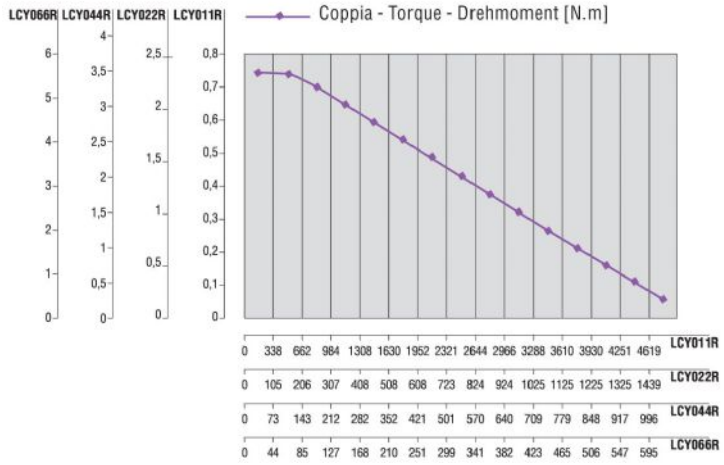

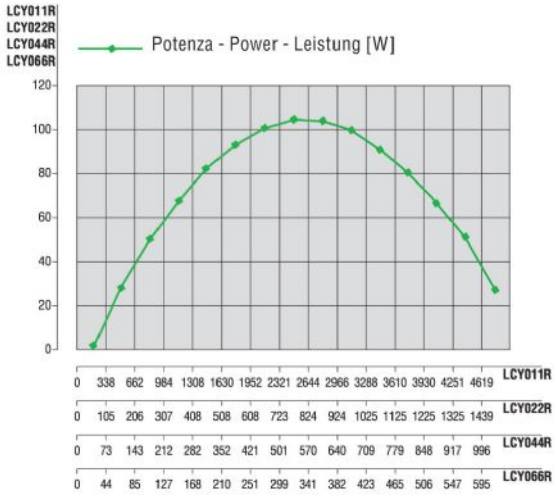

MOTORS WITH POWER UP TO 850 W

LCYO SERIES - Reversible

WATT: 110 / CONSUMPTION: 340 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm

Data sheet
LCYO22R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LCYO22	8731232	350	200	850

Overall dimensions

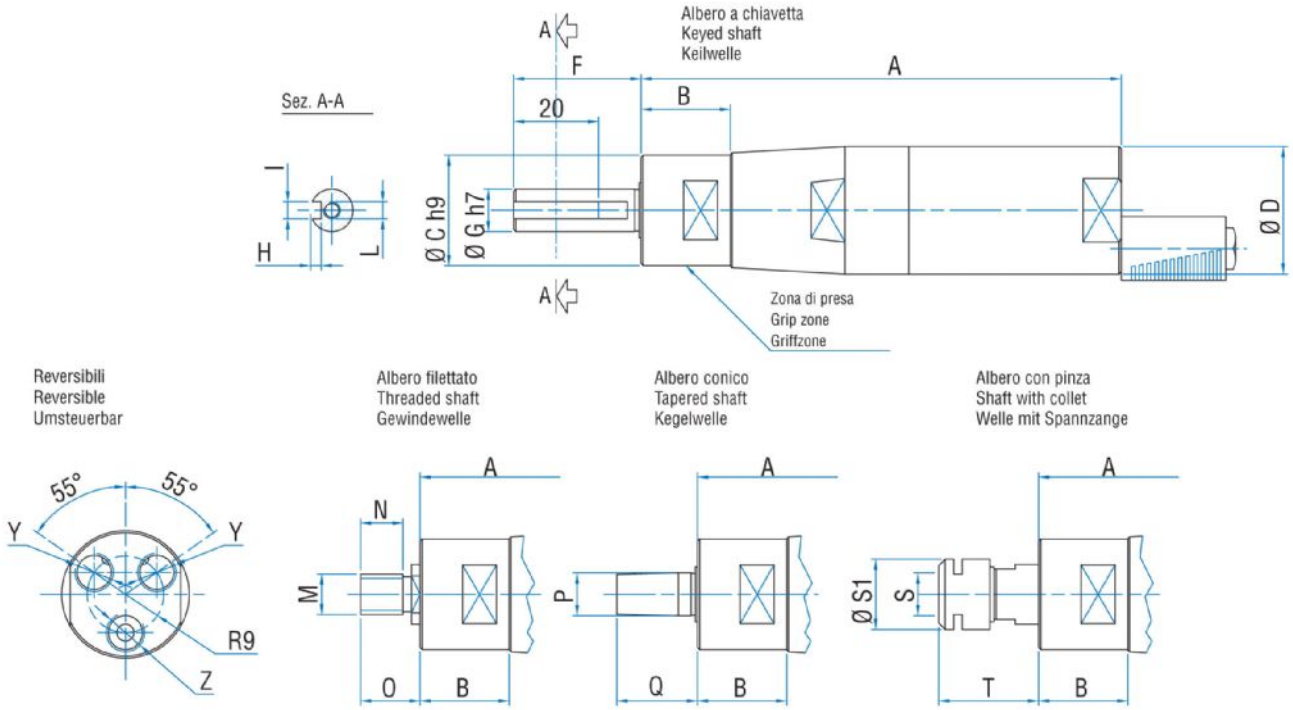

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S1
LCYO22R	8731232	126	21	26	30	30	10	2,5	4	M4	3/8"x24UNF	10	14	B10	19	ER11	16,5