

MOTORS WITH POWER UP TO 850 W

LFB SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm.

Data sheet
LFB0R



- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlets
- 4. Air exhaust



Technical specification

- Model	LFB0R
- Code	8731182
Speed rpm - No-load	5600
Speed rpm - at Max Power	3250
Torque Nm - at Max Power	0,5
Torque Nm - Stall Torque	0,8

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

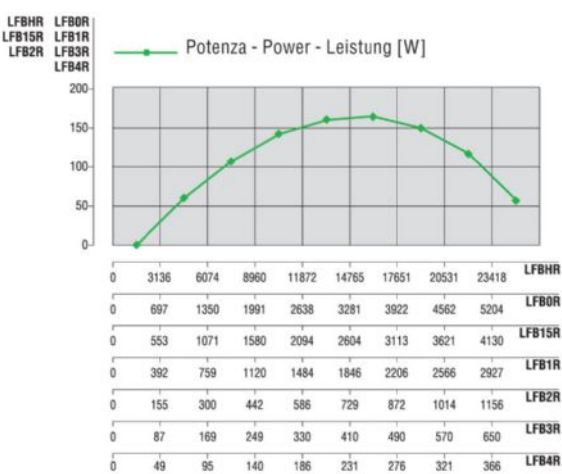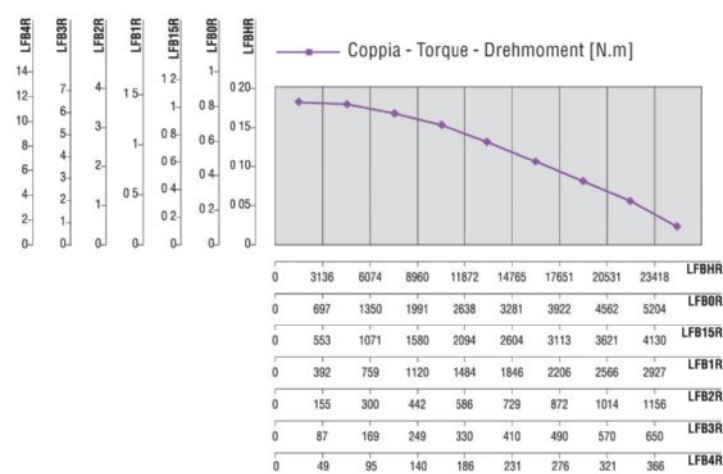

MOTORS WITH POWER UP TO 850 W

LFB SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm.

Data sheet
LFB0R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LFB0R	8731182	1050	550	2350

Overall dimensions

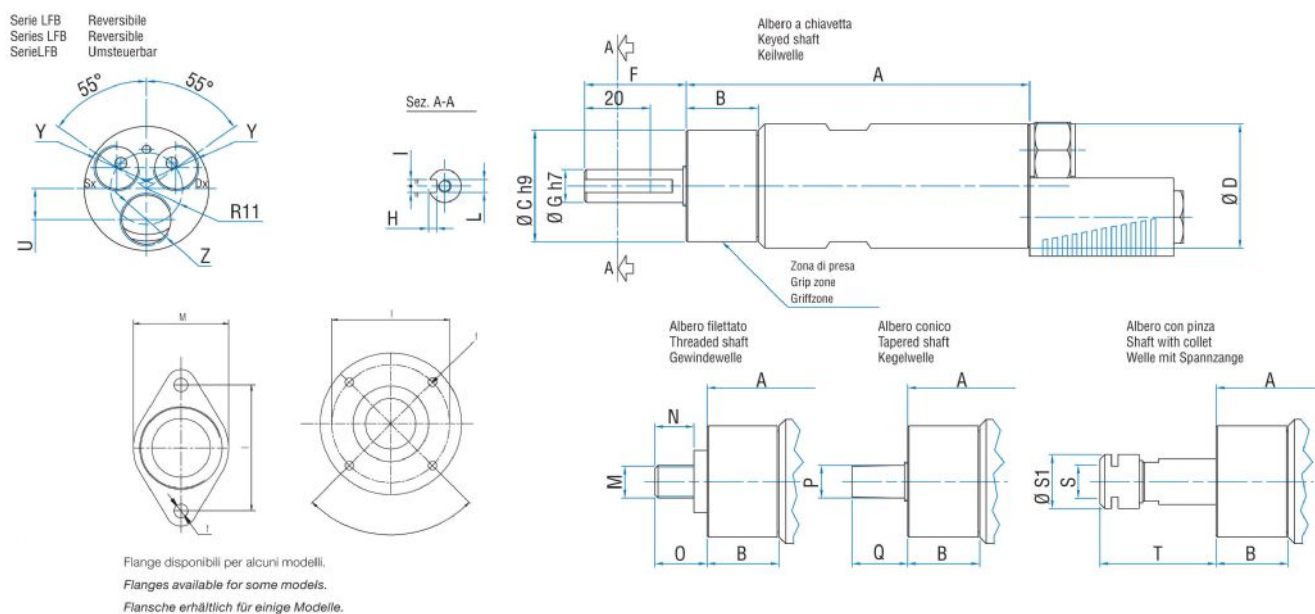

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S1	T
LFB0R	8731182	105	22	34	38	31	10	2,5	4	M4	3/8"x24UNF	12	16	B10	17	ER16	22	4