
MOTORS WITH POWER UP TO 850 W

LGS SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1"

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet
LGS0R

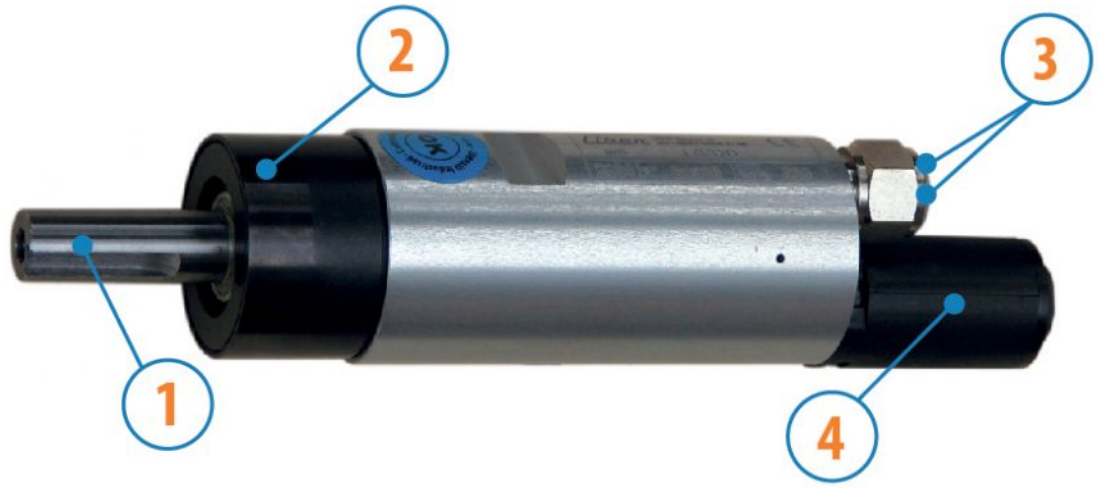

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	LGS0R
- Code	8731188
Speed rpm - No-load	4600
Speed rpm - at Max Power	2500
Torque Nm - at Max Power	1,5
Torque Nm - Stall Torque	2,2

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

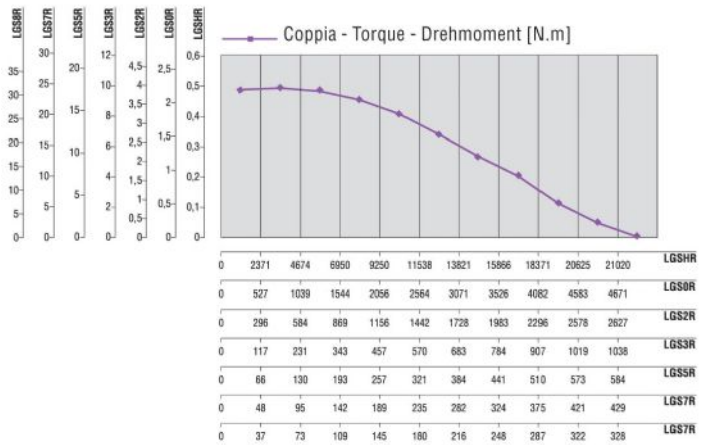

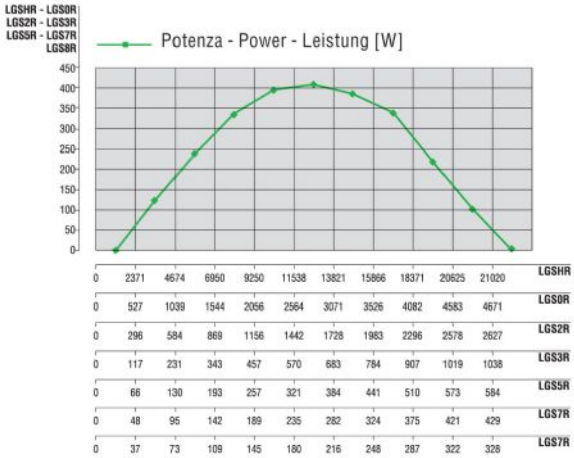

MOTORS WITH POWER UP TO 850 W

LGS SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1"

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm


Data sheet

LGS0R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LGS0R	8731188	1000	1850	3750

Overall dimensions

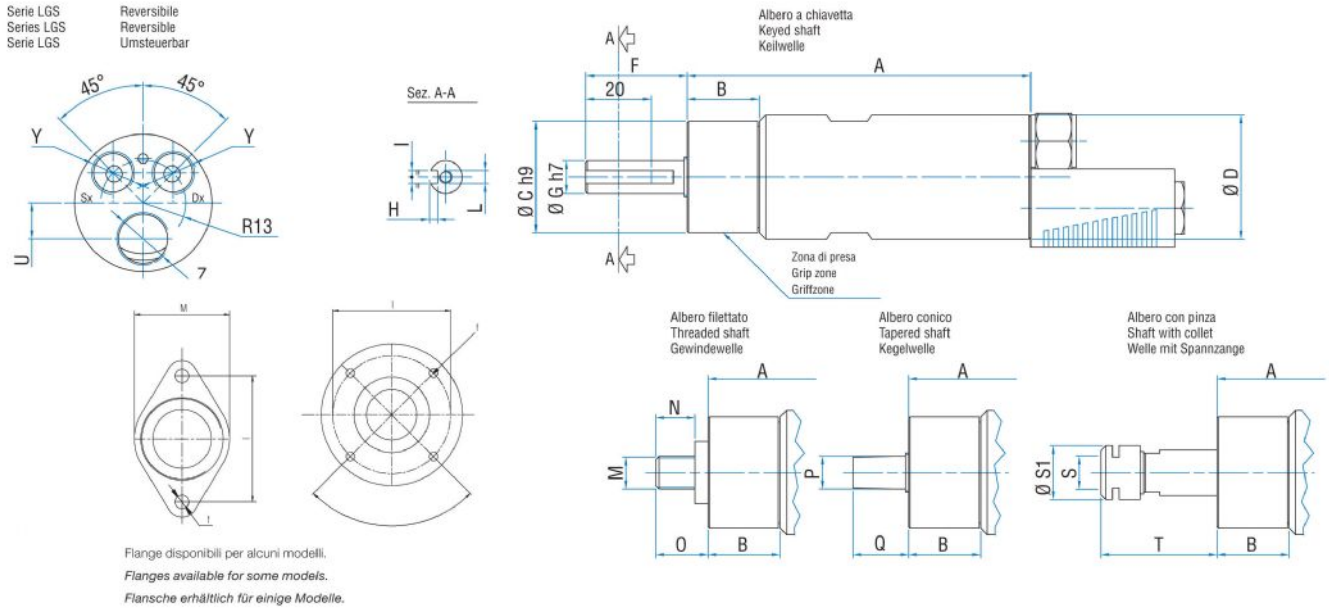

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
LGS0R	8731188	118,5	26,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16