


# MOTORS WITH POWER UP TO 850 W

MVR SERIES - Reversible

WATT: 470 / CONSUMPTION: 600 NI/1"

Data sheet

**MV40R**

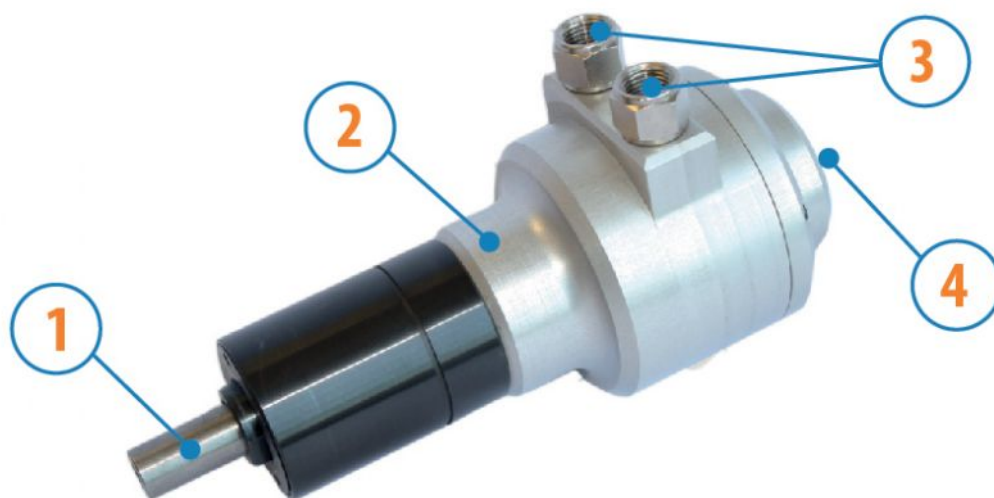

- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlets
- 4. Air exhaust

## Technical specification

- Model	MV40R
- Code	8731271
Speed rpm - No-load	2300
Speed rpm - at Max Power	1300
Torque Nm - at Max Power	4,0
Torque Nm - Stall Torque	5,7

## Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.

Optional:

Shaft

- threaded - indication /AF (left rotation excluded - subject to checks for reversible)



- conical - indication /AC

- with collets - indication / AP

Body

- with diamond flange coupling

## Characteristic curves

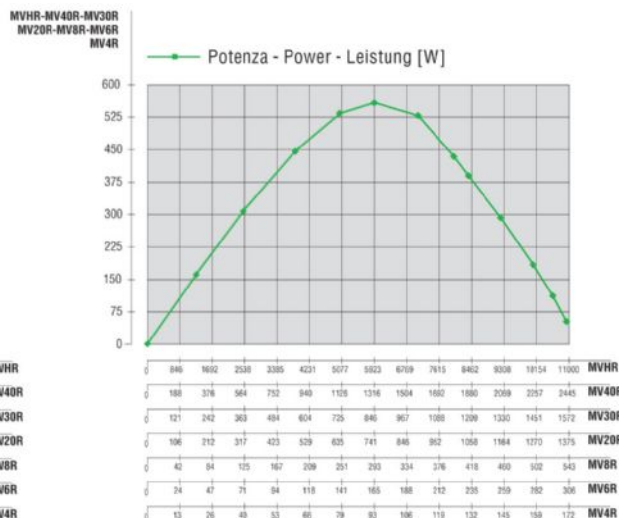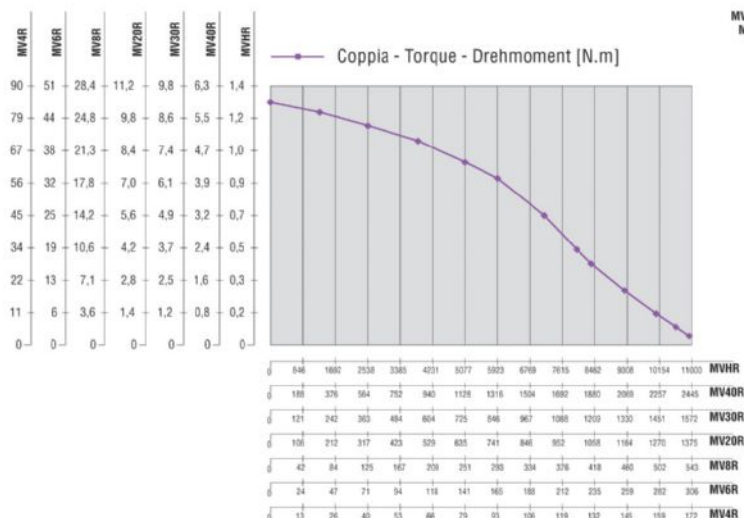

## MOTORS WITH POWER UP TO 850 W

MVR SERIES - Reversible


WATT: 470 / CONSUMPTION: 600 NI/1"

Data sheet  
**MV40R**

### Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
MV40R	8731271	1000	1850	3750

### Overall dimensions

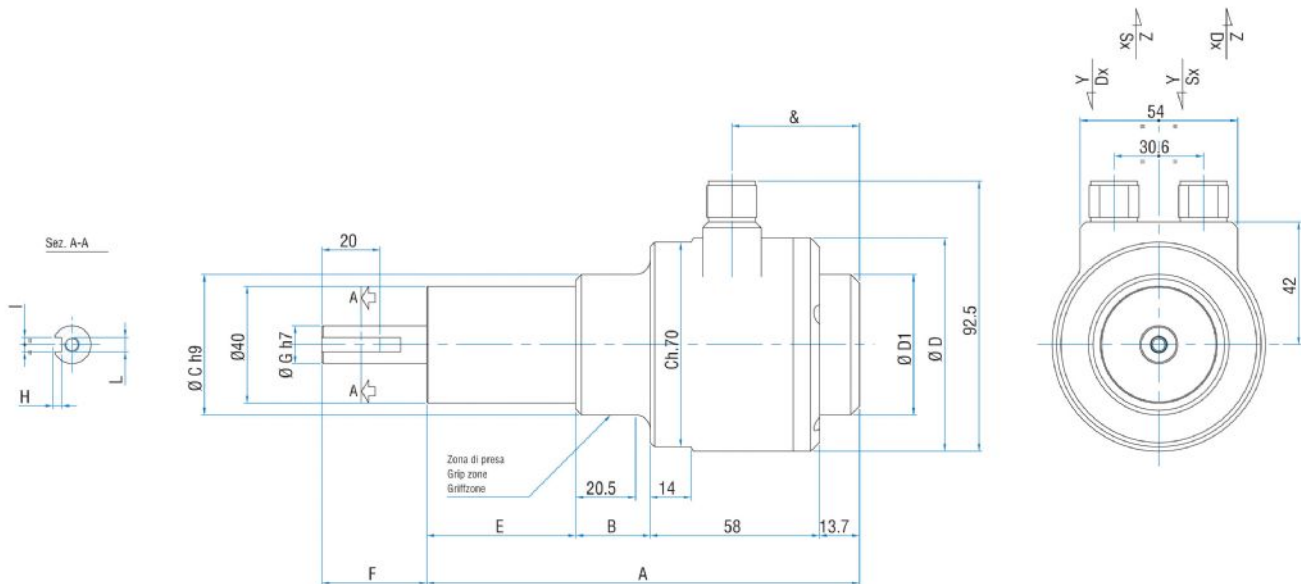

Model	Code	A	B	C	D	D1	E	F	G	H	I	L	Y	Z
MV40R	8731271	123,7	25,5	48,1	73	48,1	26,5	36	13	3	5	M5	G1/4"	G1/4"