MOTORS WITH POWER UP TO 850 W

P SERIES - Reversible

WATT: 570 / CONSUMPTION: 830 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet

P3R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	P3R
- Code	8731139
Speed rpm - No-load	380
Speed rpm - at Max Power	220
Torque Nm - at Max Power	24,5
Torque Nm - Stall Torque	40,2

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

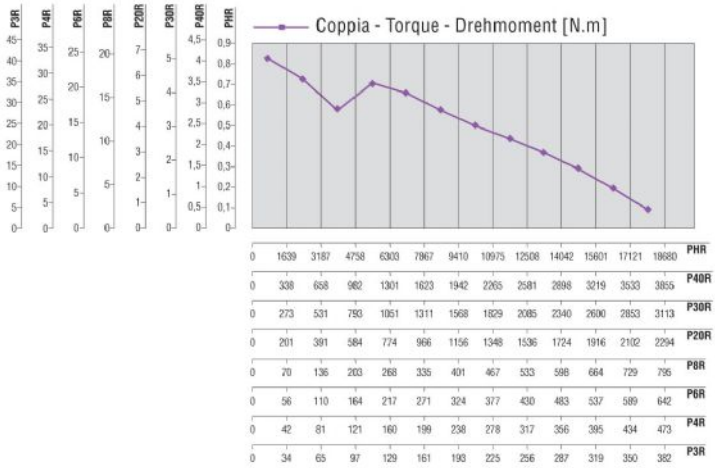

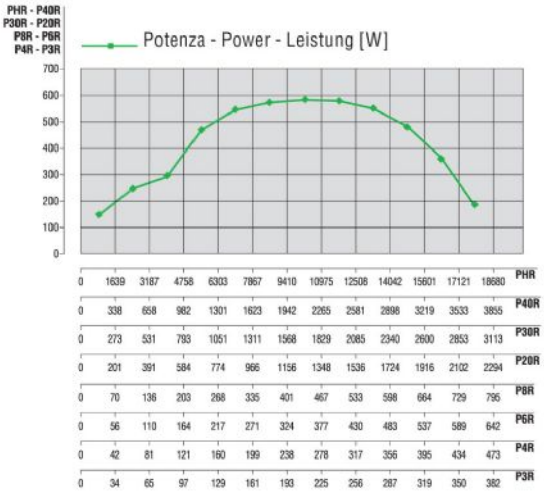

MOTORS WITH POWER UP TO 850 W

Data sheet
P3R

P SERIES - Reversible


WATT: 570 / CONSUMPTION: 830 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
P3R	8731139	2050	2350	4750

Overall dimensions

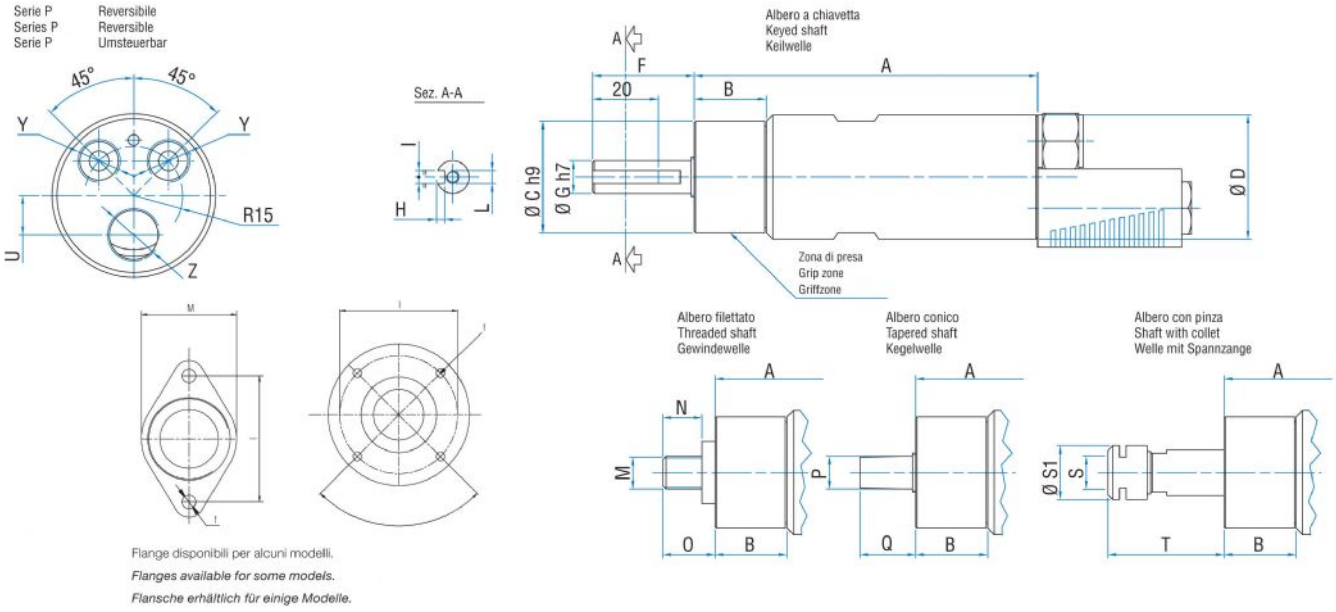

Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
P3R	8731139	154	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2