MOTORS WITH POWER UP TO 850 W

P SERIES - Reversible

WATT: 570 / CONSUMPTION: 830 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet

P8R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	P8R
- Code	8731136
Speed rpm - No-load	800
Speed rpm - at Max Power	450
Torque Nm - at Max Power	11,8
Torque Nm - Stall Torque	19,3

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

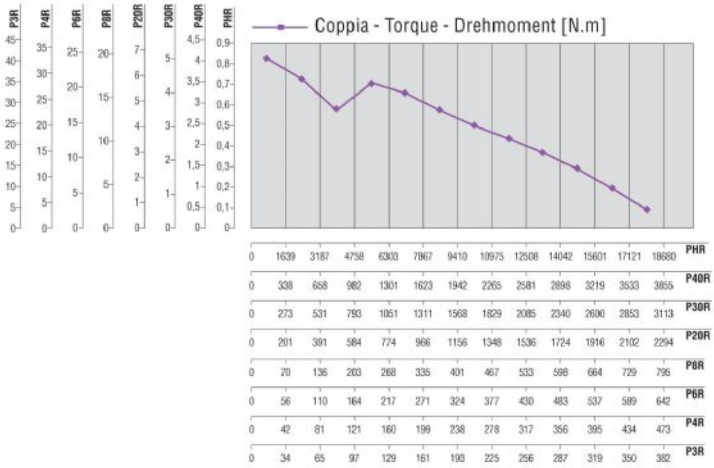

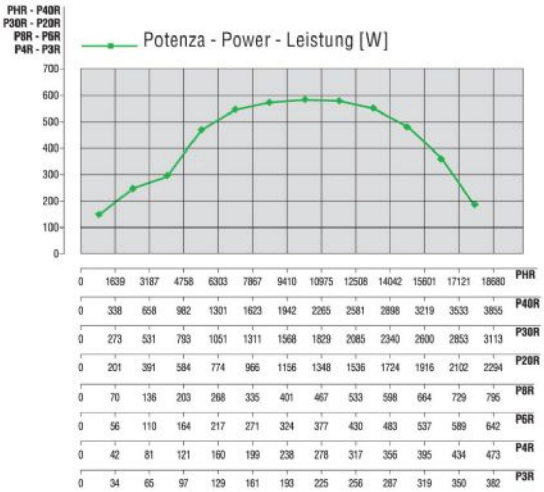

MOTORS WITH POWER UP TO 850 W

P SERIES - Reversible

WATT: 570 / CONSUMPTION: 830 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm


Data sheet

P8R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
P8R	8731136	2050	2350	4750

Overall dimensions

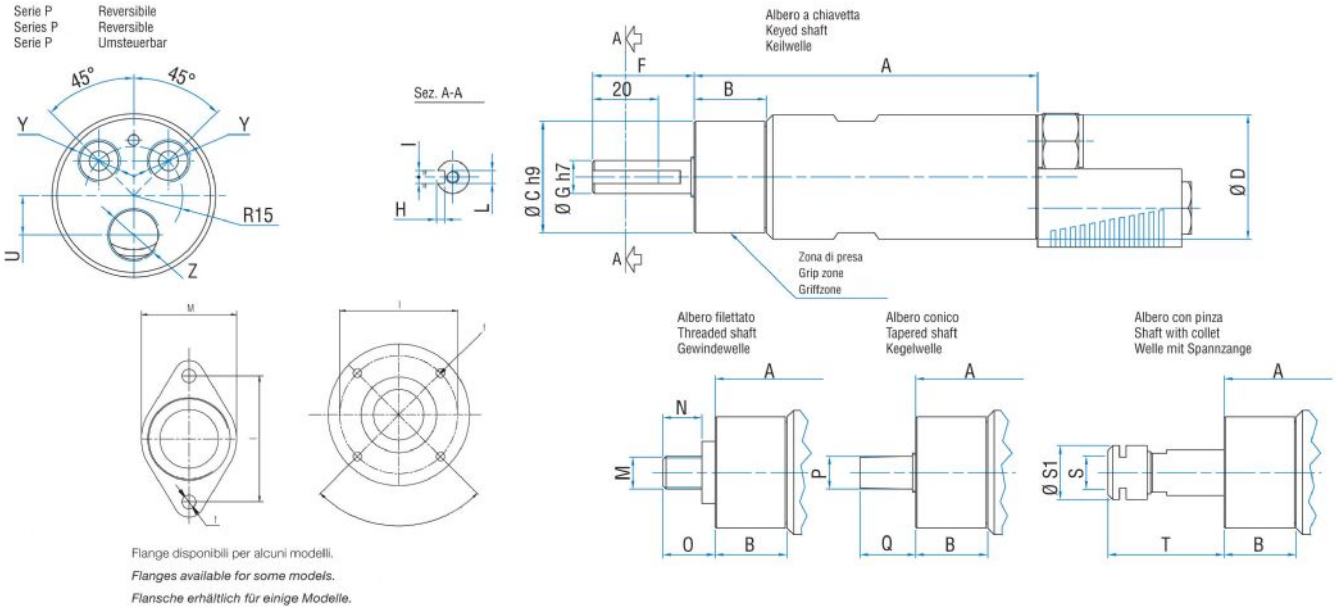

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
P8R	8731136	154	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2