
MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS3R

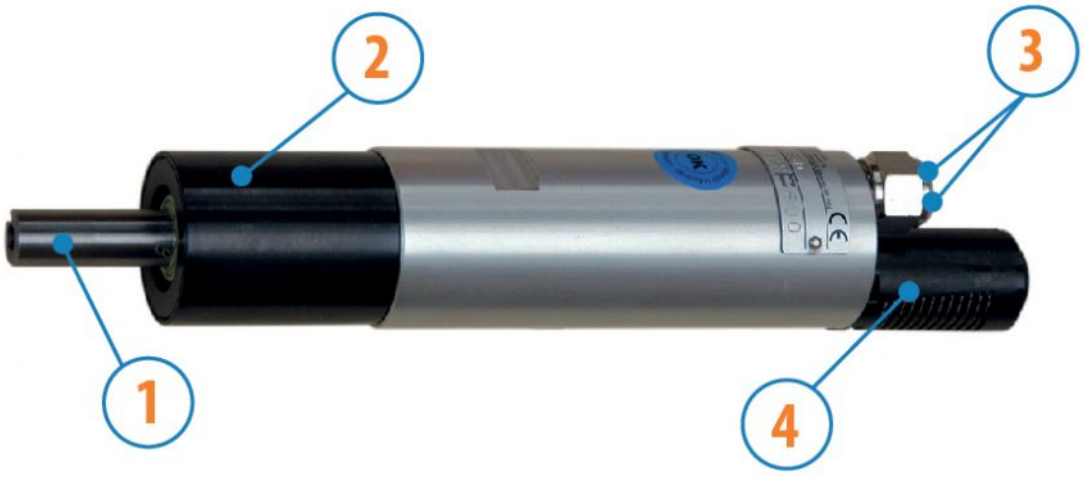

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	SLGS3R
- Code	8731197
Speed rpm - No-load	780
Speed rpm - at Max Power	390
Torque Nm - at Max Power	10
Torque Nm - Stall Torque	14,2

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

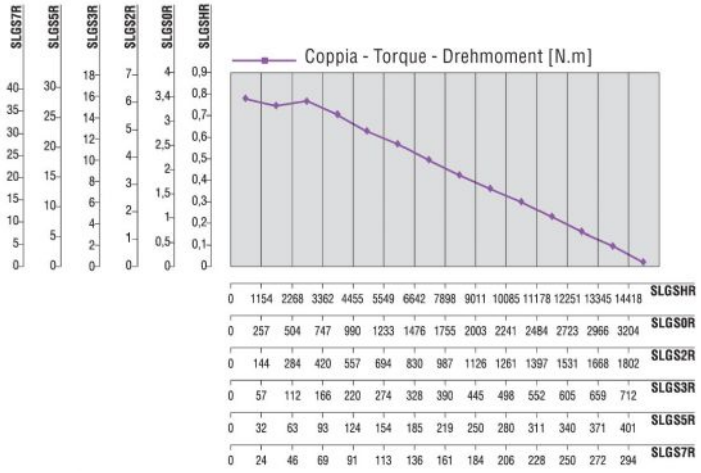

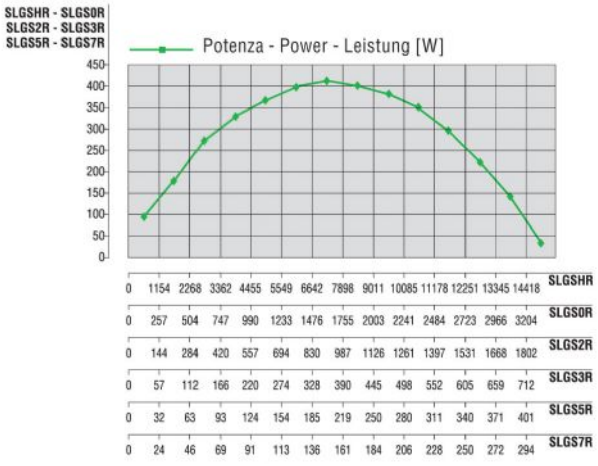

MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS3R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS3R	8731197	1000	1850	3750

Overall dimensions

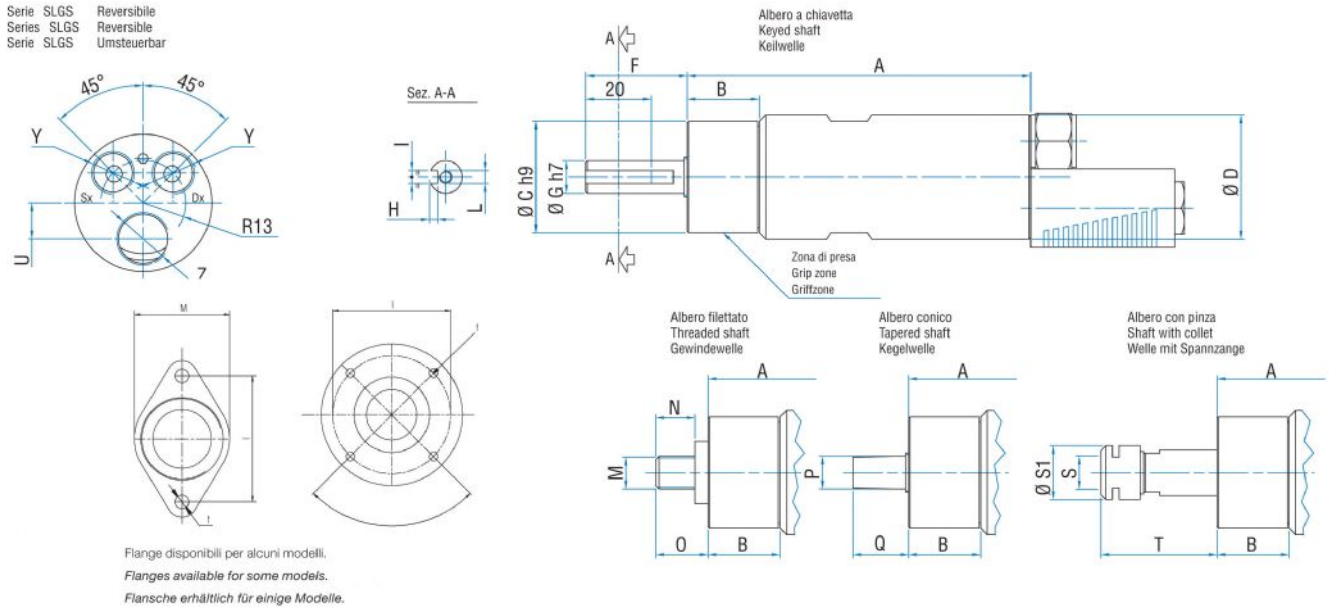

Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
SLGS3R	8731197	168,5	51,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16