


MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Non reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data sheet
SLGS7D

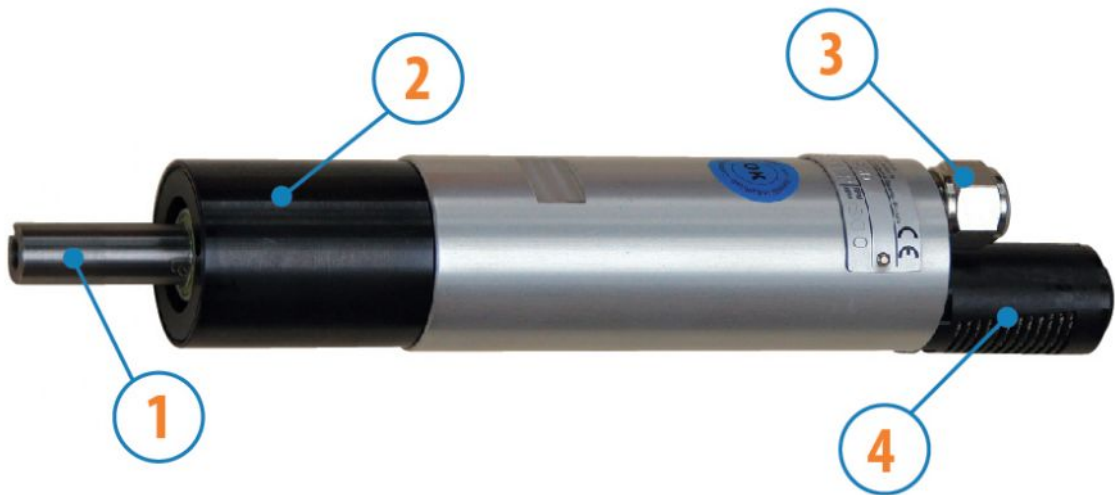

- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlet
- 4. Air exhaust



Technical specification

Right rotation - Model	SLGS7D
Right rotation - Code	8711199
Speed rpm - No-load	330
Speed rpm - at Max Power	110
Torque Nm - at Max Power	28,3
Torque Nm - Stall Torque	55,2

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

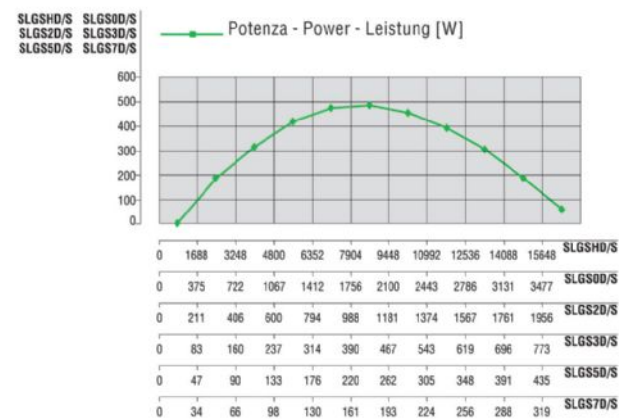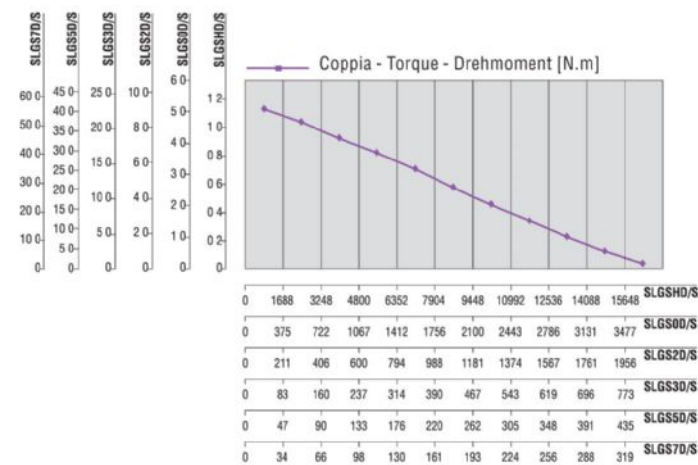

MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Non reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data sheet
SLGS7D

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS7D	8711199	1000	1850	3750

Overall dimensions

