MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

Data sheet
T30R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	T30R
- Code	8731202
Speed rpm - No-load	2600
Speed rpm - at Max Power	1350
Torque Nm - at Max Power	5
Torque Nm - Stall Torque	7,7

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

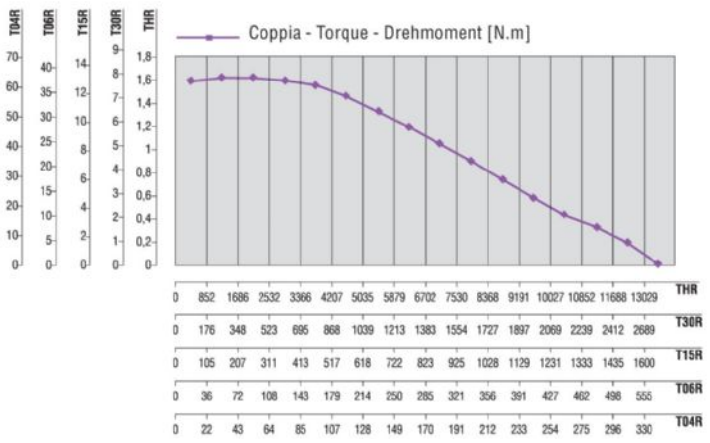

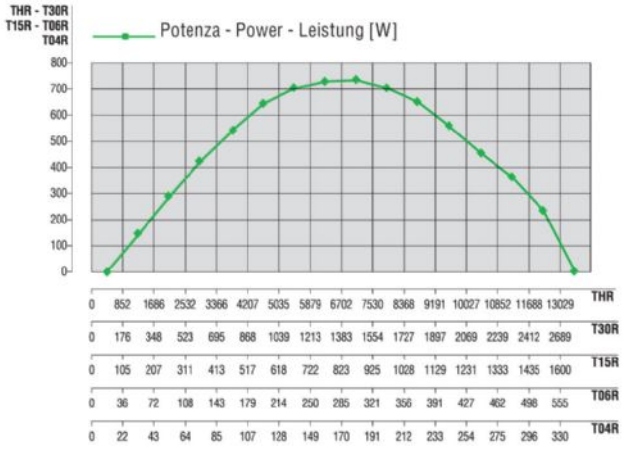

MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm


Data sheet

T30R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
T30R	8731202	2050	2350	4750

Overall dimensions

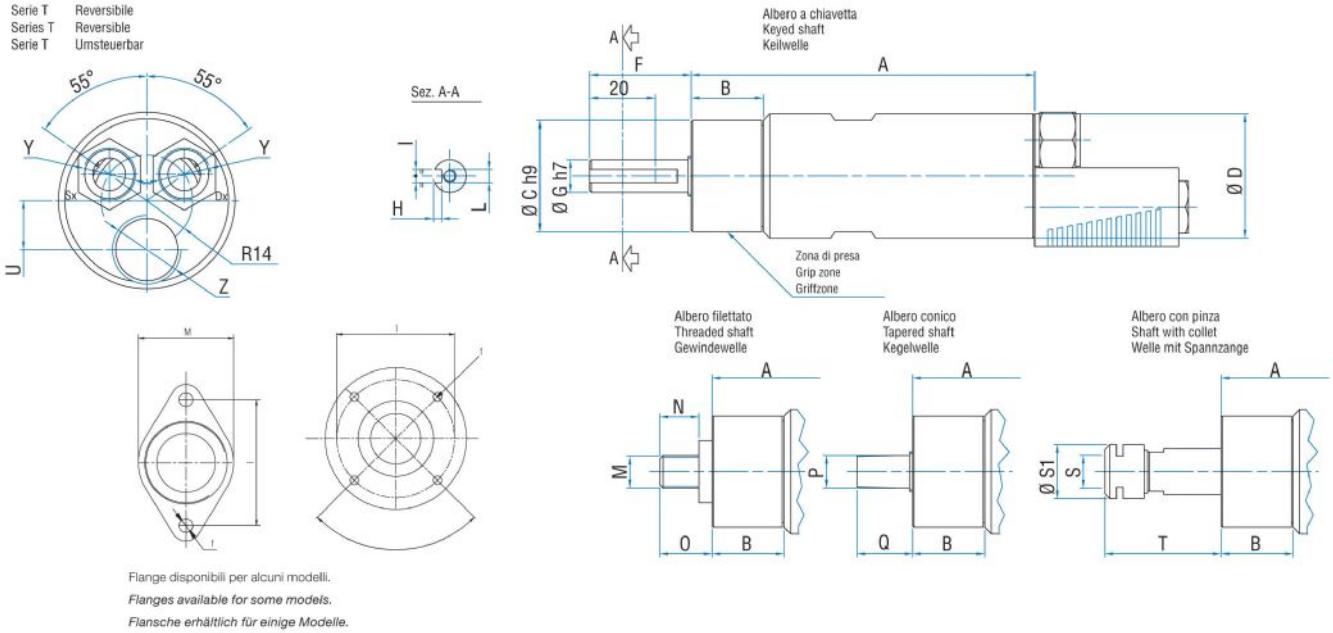

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q
T30R	8731202	199,5	31,5	48	54	31,5	14	3	5	M6	1/2"x20UNF	16,5	21,5	B12	26