

## MOTORS WITHOUT CLUTCH (STALL ADJUSTMENT)

LACS GD SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet  
**LACS80GD**



1. Square axial connection for plug sockets
2. Stroke compensator
3. Air inlet
4. Air exhaust

### Technical specification

Right rotation - Model	LACS80GD
Right rotation - Code	8604131.1
No-load speed - rpm/min	70
Torque Nm - Nm	147
Screws tightening	M12-M14
Bush holder	1/2" (3/8")

### Form features

- Sliding axial coupling with stroke compensator.  
Other versions available on request:
- Rigid shaft (without axial stroke compensation)
  - Short shaft
  - Short rigid shaft (without axial stroke compensation).

# MOTORS WITHOUT CLUTCH (STALL ADJUSTMENT)



Data sheet  
**LACS80GD**

LACS GD SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

## Characteristic curves

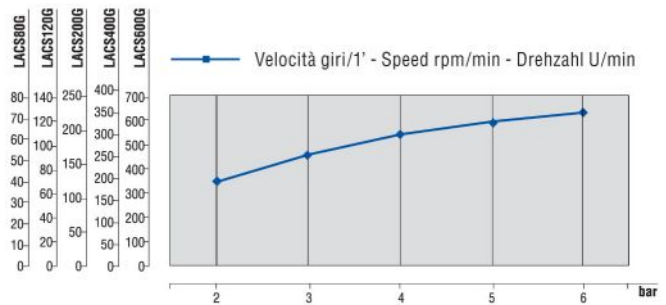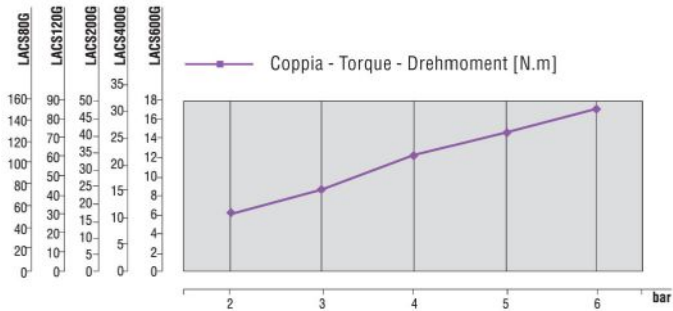

## Overall dimensions

