


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet
ALCYO66 AT

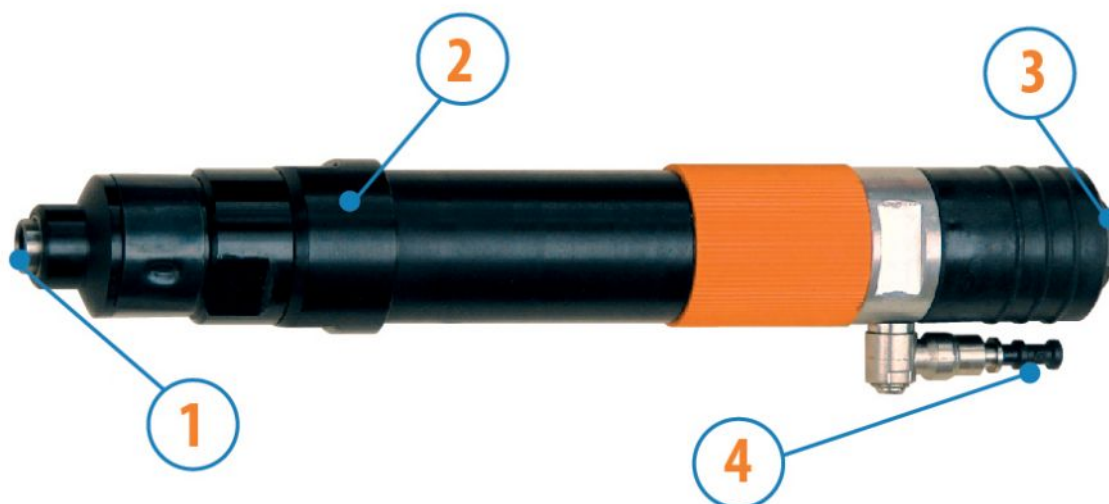

- 1. 1/4" hexagonal bit holder
- 2. Grip zone
- 3. Compressed air inlet
- 4. Screwing completed signal

Technical specification

Right rotation - Model	ALCYO66 AT
Right rotation - Code	8604276
No-load speed - rpm/min	500
Torque Nm - Nm	1,7 - 3,7
Clutch spring	Neutral

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Torque Adjustment

Data sheet
ALCYO66 AT

