


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

Data sheet
ALGS5D ATE (**)

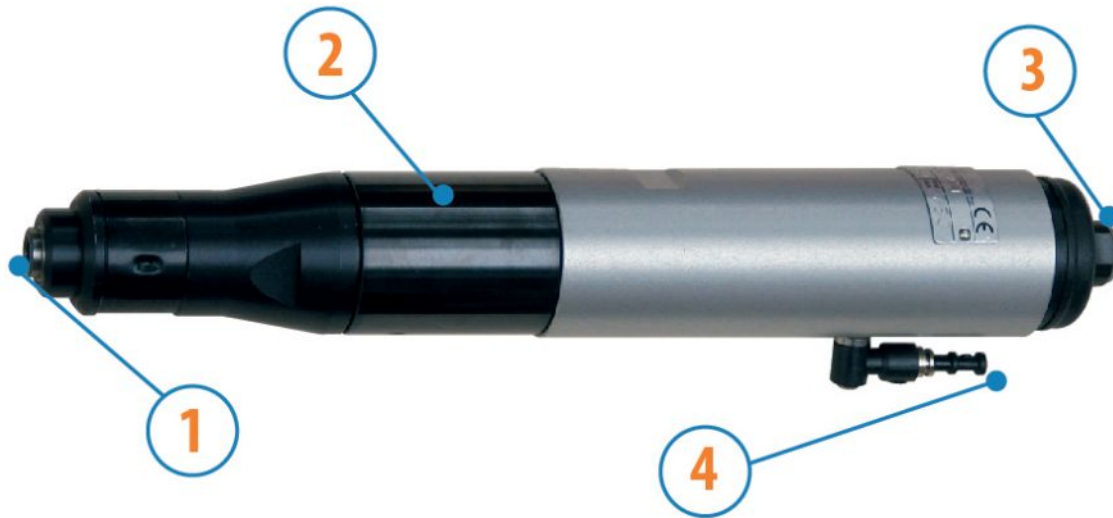

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

Right rotation - Model	ALGS5D ATE (**)
Right rotation - Code	8604246
No-load speed - rpm/min	450
Torque Nm - Nm	4,8 - 14,6
Clutch spring	Gold

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALGS5D ATE (**)

ALGS ACCU-TRK SERIES - Non reversible


WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (***) Optional on ATE version: direct starting for right and reversible motors.

Torque Adjustment

Codice molla spring code bestellnr.feder	Colore molla spring color Farbe der feder		Campo di regolazione Nm Adjustement range Einstellbereich
5 08 01 98	Azzurra Light blue Hellblau	0.4-0.9	0.5 - 1.0
5 08 02 13	Blu Blue Blau	0.8-2	1.0 - 2.0
5 08 02 17	Neutra Neutral neutral	1.7-3.7	2.0 - 3.5
5 08 01 26	Arancio Orange Orange	1.8-3.5	2.0 - 3.5
5 08 02 18	Argento Silver Silber	2-7.6	2.0 - 7.5
5 08 02 02	Oro Gold Gold	4.8-14.6	5.0 - 14.5
5 08 02 22	Platino Platinum Platin	6-16	6.0 - 16.0

Overall dimensions

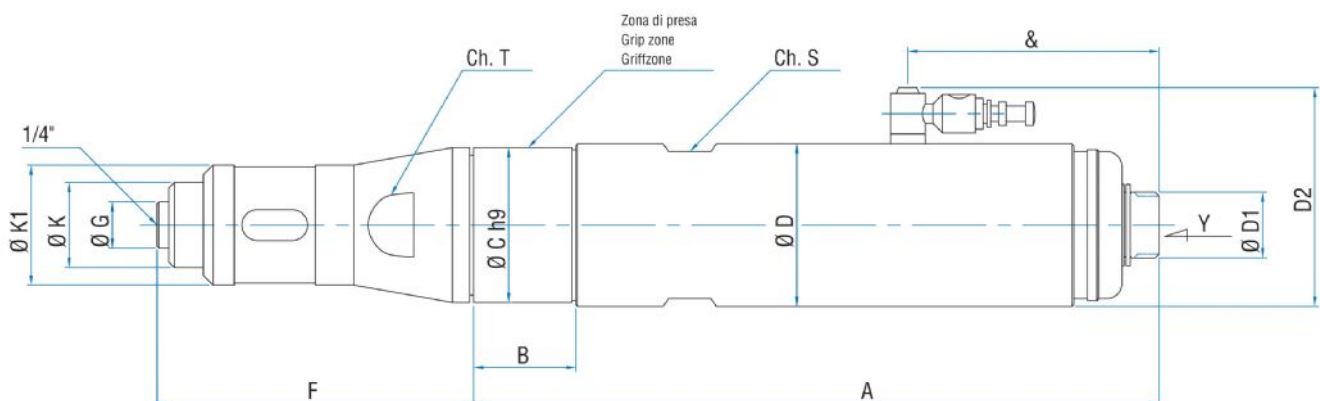

**MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH**

Data sheet
ALGS5D ATE ()**

ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8

mm (*) With platinum springs and optional cams (**)

Optional on ATE version: direct starting for right and reversible motors.

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
ALGS5D ATE (**)	8604246	202,5	51,5	40	42	17	56	82	12	22	31	38	32	1/4"	65