

## MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10

mm \* = With platinum springs and optional cams (\*\*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet  
SALGS5D ATE (\*\*)



1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

### Technical specification

Right rotation - Model	SALGS5D ATE (**)
Right rotation - Code	8604344
No-load speed - rpm/min	400
Torque Nm - Nm	4,8 - 14,6 (20)*
Clutch spring	Gold

### Form features

Standard coupling bit holder 1/4" (6.35 mm)

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet  
SALGS5D ATE (\*\*)

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10


mm \* = With platinum springs and optional cams (\*\*) Optional on ATE

version: direct starting for Right and reversible motors.

## Torque Adjustment

Codice molla spring code bestellnr.feder	Colore molla spring color Farbe der feder	Campo di regolazione Nm Adjustement range Einstellbereich
5 08 01 98	Azzurra Light blue Hellblau	0.4-0.9
5 08 02 13	Blu Blue Blau	0.8-2
5 08 02 17	Neutra Neutral neutral	1.7-3.7
5 08 01 26	Arancio Orange Orange	1.8-3.5
5 08 02 18	Argento Silver Silber	2-7.6
5 08 02 02	Oro Gold Gold	4.8-14.6
5 08 02 22	Platino Platinum Platin	6-16

## Overall dimensions

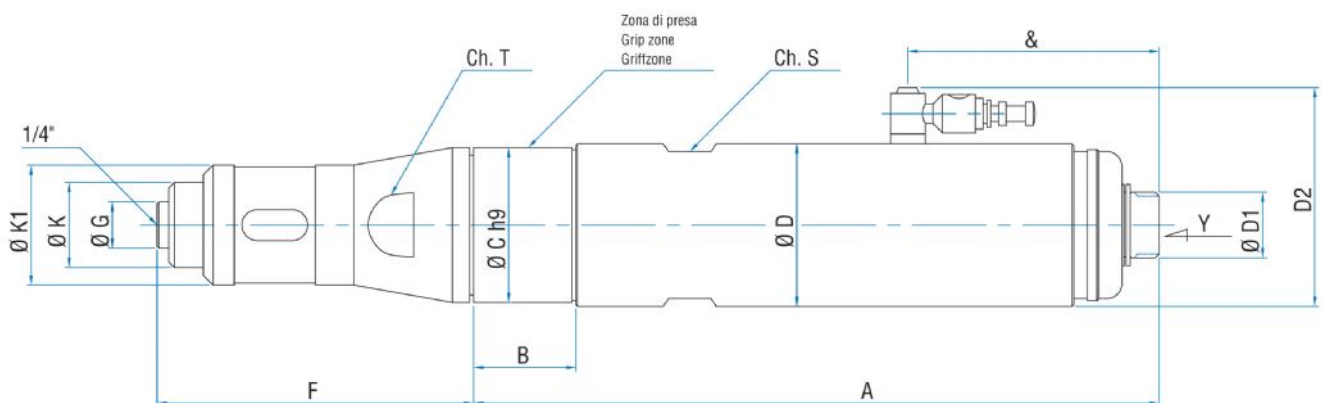

**MOTORS FOR SCREW DRIVING  
APPLICATIONS WITH ACCU-TRK CLUTCH**

Data sheet  
**SALGS5D ATE (\*\*)**

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10

mm \* = With platinum springs and optional cams (\*\*)

Optional on ATE

version: direct starting for Right and reversible motors.

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
SALGS5D ATE (**)	8604344	227,5	51,5	40	42	17	56,5	82	12	22	31	38	32	1/4"	65