

## MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

ALGS FR SERIES - Non-reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data sheet  
**ALGS8D FR**



1. 1/4" hexagonal bit holder connection
2. Grip zone
3. Air inlet
4. Air exhaust

### Technical specification

Right rotation - Model	ALGS8D FR
Right rotation - Code	8604211
No-load speed - rpm/min	300
Torque Nm - Nm	20,7
Screws tightening	M5-M6
Clutch spring	Red
Clutch unit	7311144

### Form features


Allow the tightening torque to be adjusted through a friction clutch.  
Output shaft with axial sliding (3 mm), on request without scrolling.  
Standard bit holder coupling 1/4" (6.35 mm).

# MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

ALGS FR SERIES - Non-reversible  
WATT: 430 / CONSUMPTION: 600 NI/1'

Data sheet  
**ALGS8D FR**

## Overall dimensions

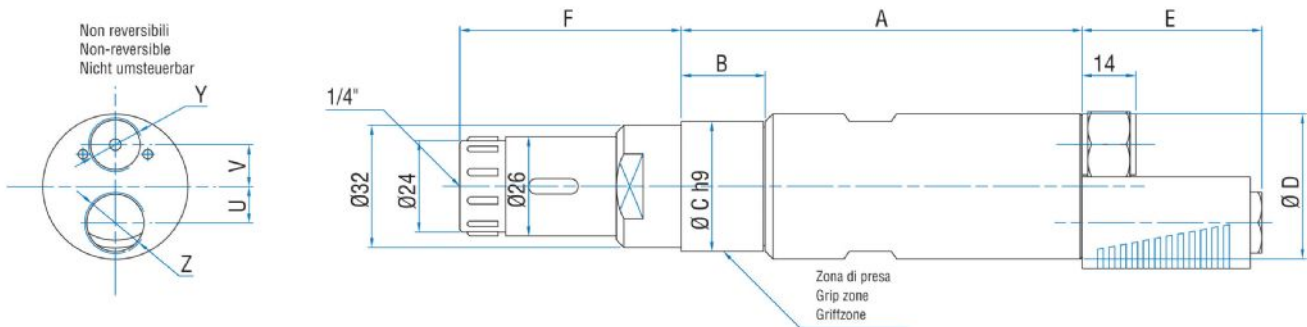

Model	Code	A	B	C	D	E	F	U	V	Y	Z
ALGS8D FR	8604211	143,5	54	40	42	47	56,9	11	13	1/4"	3/8"