

MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

SALGS FR SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SALGS2D FR



- 1. 1/4" hexagonal bit holder connection
- 2. Grip zone
- 3. Air inlet
- 4. Air exhaust

Technical specification

Right rotation - Model	SALGS2D FR
Right rotation - Code	8604302
No-load speed - rpm/min	2000
Torque Nm - Nm	9,0
Screws tightening	M4-M5
Clutch spring	Neutral
Clutch unit	7311143

Form features

Allow the tightening torque to be adjusted through a friction clutch. Output shaft with axial sliding (3 mm), on request without scrolling. Standard bit holder coupling 1/4" (6.35 mm).

MOTORS FOR SCREWDRIVING
APPLICATIONS WITH SLIP-TRK CLUTCH


SALGS FR SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SALGS2D FR

Overall dimensions

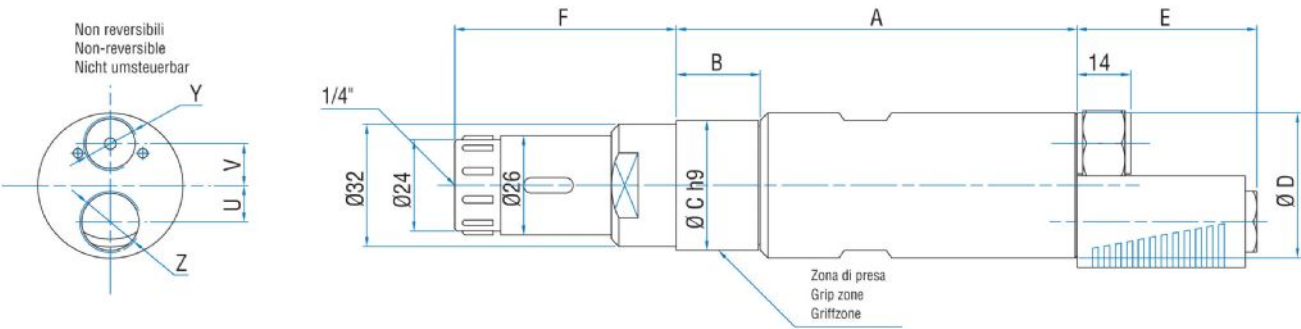

Model	Code	A	B	C	D	E	F	U	V	Y	Z
SALGS2D FR	8604302	143,5	29	40	42	47	56,9	11	13	1/4"	3/8"