


## MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

ALFB FR SERIES - Non-reversible  
WATT: 190 / CONSUMPTION: 480 NI/1'

Data sheet  
**ALFB2D FR**

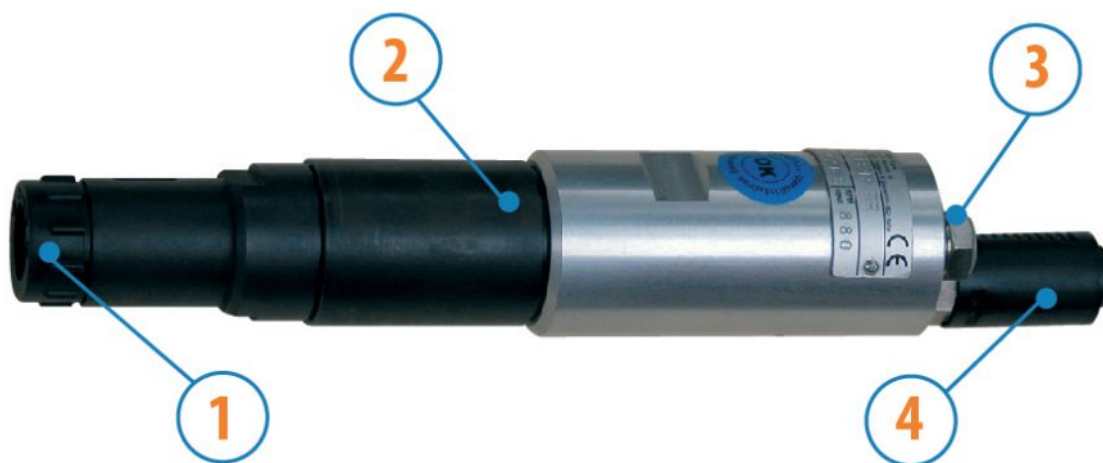

- 1. 1/4" hexagonal bit holder connection
- 2. Grip zone
- 3. Air inlet
- 4. Air exhaust

### Technical specification

|                         |           |
|-------------------------|-----------|
| Right rotation - Model  | ALFB2D FR |
| Right rotation - Code   | 8604202   |
| No-load speed - rpm/min | 1000      |
| Torque Nm - Nm          | 2,5       |
| Screws tightening       | M3-M4     |
| Clutch spring           | White     |
| Clutch unit             | 7311142   |

### Form features


Allow the tightening torque to be adjusted through a friction clutch.  
Output shaft with axial sliding (3 mm), on request without scrolling.  
Standard bit holder coupling 1/4" (6.35 mm).

MOTORS FOR SCREWDRIVING  
APPLICATIONS WITH SLIP-TRK CLUTCH

ALFB FR SERIES - Non-reversible  
WATT: 190 / CONSUMPTION: 480 NI/1'

Data sheet  
ALFB2D FR

Overall dimensions

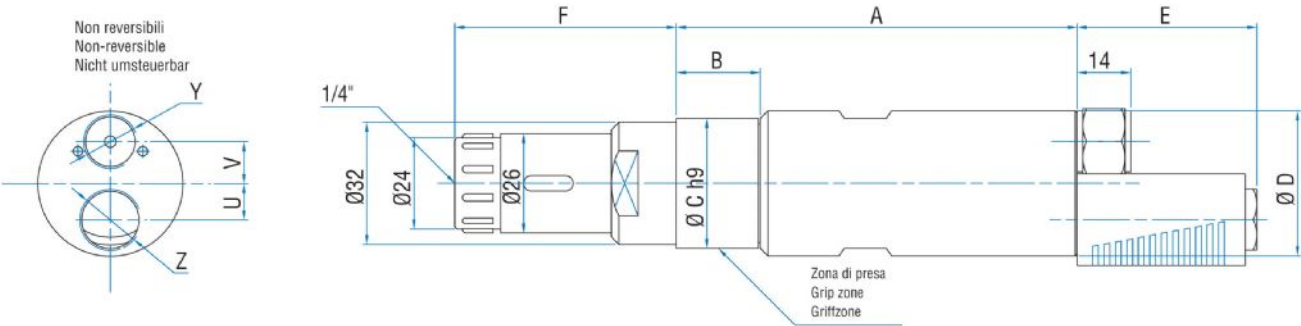

| Model        | Code    | A     | B    | C  | D  | E  | F  | U   | V  | Y    | Z    |
|--------------|---------|-------|------|----|----|----|----|-----|----|------|------|
| ALFB2D<br>FR | 8604202 | 129,7 | 46,7 | 34 | 38 | 47 | 58 | 9,5 | 11 | 1/4" | 3/8" |