# MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

Data sheet
**ALGS3R FR**

ALGS FR SERIES - Reversible

WATT: 400 / CONSUMPTION: 500 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm




## Technical specification

| | |
|---|---|
| Right rotation - Model | ALGS3R FR |
| Right rotation - Code | 8604217 |
| No-load speed - rpm/min | 900 |
| Torque Nm - Nm | 6,3 |
| Screws tightening | M4-M5 |
| Clutch spring | Neuter |
| Clutch unit | 7311143 |

## Form features

Allow the tightening torque to be adjusted through a friction clutch.
Output shaft with axial sliding (3 mm), on request without scrolling.
Standard bit holder coupling 1⁄4" (6.35 mm).

# MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH


Data sheet
**ALGS3R FR**

ALGS FR SERIES - Reversible

WATT: 400 / CONSUMPTION: 500 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

## Overall dimensions

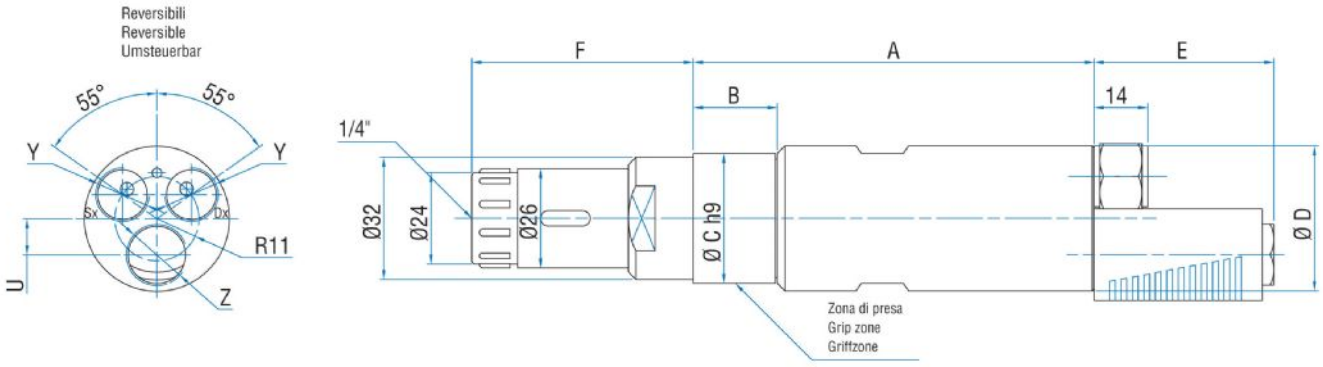


| Model | Code | A | B | C | D | E | F | U | V | Y | Z |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ALGS3R FR | 8604217 | 143,5 | 54 | 40 | 42 | 47 | 56,9 | 11 | 13 | 1/4" | 3/8" |