


# MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Non reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data sheet  
**SLGS5D**

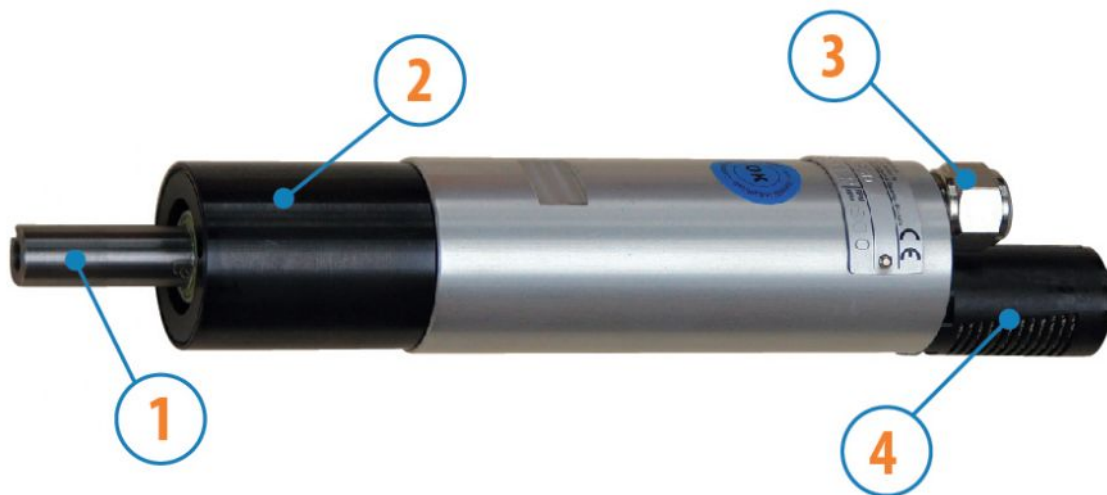

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

## Technical specification

Right rotation - Model	SLGS5D
Right rotation - Code	8711198
Speed rpm - No-load	450
Speed rpm - at Max Power	230
Torque Nm - at Max Power	20,8
Torque Nm - Stall Torque	40,5

## Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.

Optional:

Shaft

- threaded - indication /AF (left rotation excluded - subject to checks for reversible)



- conical - indication /AC

- with collets - indication / AP

Body

- with diamond flange coupling

## Characteristic curves

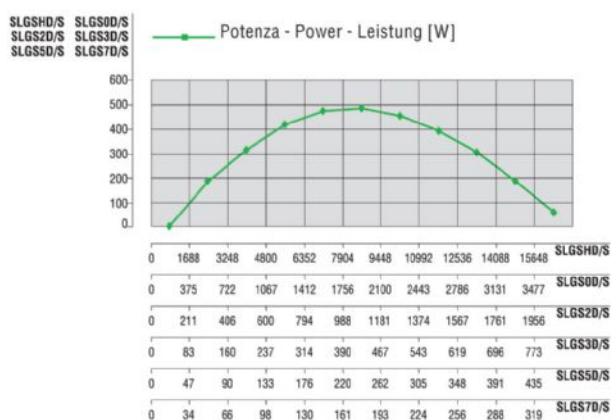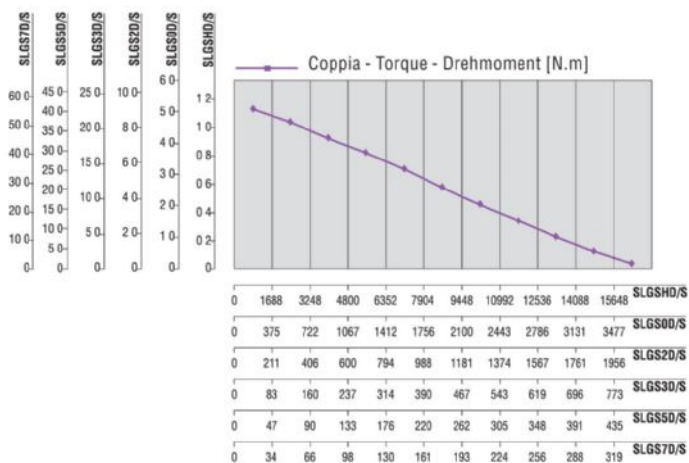

# MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Non reversible

WATT: 480 / CONSUMPTION: 870 NI/1'



Data sheet  
**SLGS5D**

## Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS5D	8711198	1000	1850	3750

## Overall dimensions

Serie Non reversibili  
Series **SLGS** Non-reversible  
Serie Nicht umsteuerbar

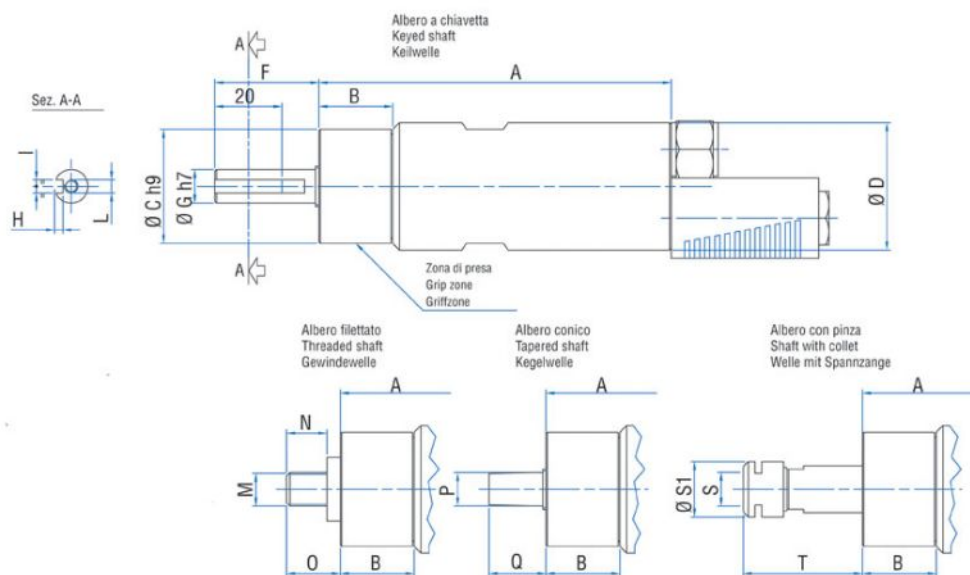

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
SLGS5D	8711198	168,5	51,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16