


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALFB ACCU-TRK SERIES - Non reversible

WATT: 190 / CONSUMPTION: 480 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet
ALFB22 ATE (*)

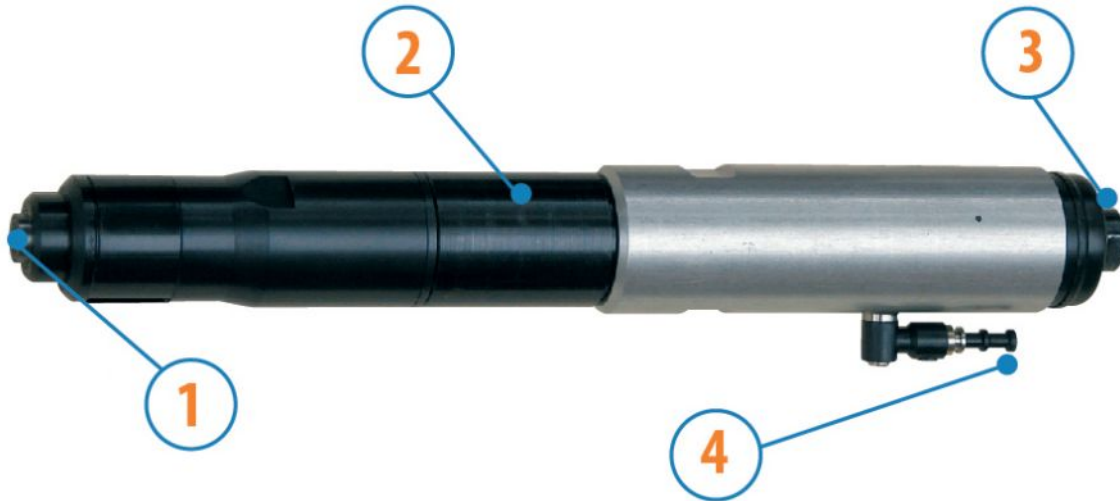

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

Right rotation - Model	ALFB22 ATE (*)
Right rotation - Code	8604250
No-load speed - rpm/min	1000
Torque Nm - Nm	1,8 - 3,5
Clutch spring	Orange

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALFB22 ATE (*)

ALFB ACCU-TRK SERIES - Non reversible


WATT: 190 / CONSUMPTION: 480 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Torque Adjustment

Codice molla spring code bestellnr.feder	Colore molla spring color Farbe der feder	Campo di regolazione Nm Adjustement range Einstellbereich
5 08 01 98	Azzurra Light blue Hellblau	0.4-0.9
5 08 02 13	Blu Blue Blau	0.8-2
5 08 02 17	Neutra Neutral neutral	1.7-3.7
5 08 01 26	Arancio Orange Orange	1.8-3.5
5 08 02 18	Argento Silver Silber	2-7.6
5 08 02 02	Oro Gold Gold	4.8-14.6
5 08 02 22	Platino Platinum Platin	6-16

Overall dimensions

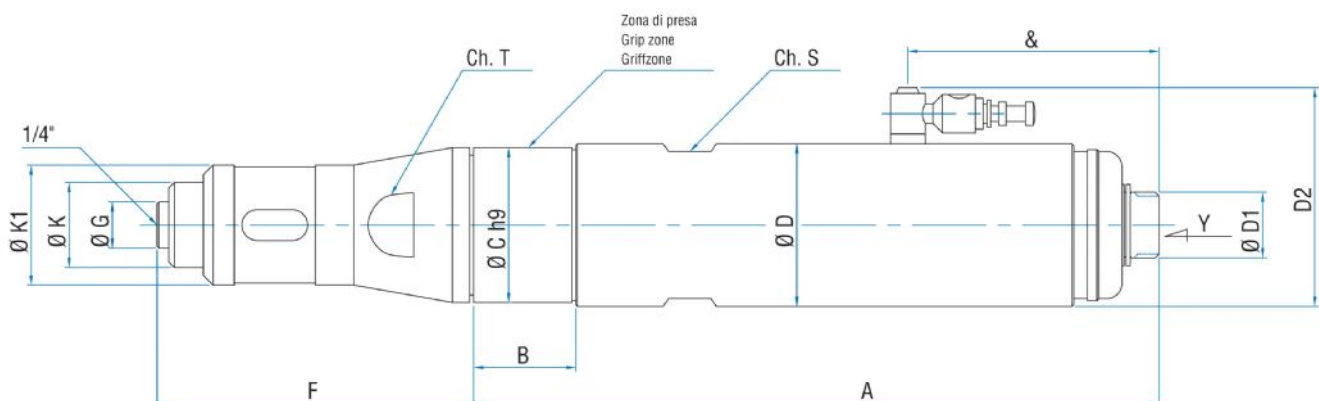

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALFB ACCU-TRK SERIES - Non reversible

WATT: 190 / CONSUMPTION: 480 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet
ALFB22 ATE (*)

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
ALFB22 ATE (*)	8604250	169,7	27,7	34	38	17	52,5	100	12	22	31	34	32	1/4"	65